


FS & FS-KL Series

Checkweighing Scale

**Easy-to-Use,
Rugged
Waterproof
Stainless Steel
Scales**

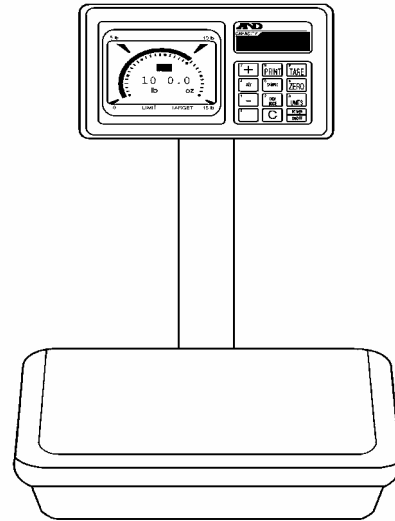

Features

- Exclusive Analog Sweep LCD Display. The FS Series is designed for quick operator judgment using our exclusive 30 segment Analog Sweep Display
- Tilt Display Head and Digital keypad. Display head can be easily tilted for a better viewing angle or operator access
- Dual Range Flexibility automatically switches at half of scale capacity for accuracy where you need it
- Additional Pound/Ounce Unit: Weigh in exclusive Pound/Ounce mode in addition to decimal pounds
- Battery operation: The FS Series is powered by six 'C' size batteries that provide a minimum for 400 hours (KA versions with alkaline cells) of operation or use an optional AC Adapter
- Waterproof to NEMA 4/IP-65. The FS Series is designed for use in wet environments and is suitable for hose down cleaning
- Backlit Display available for Low Light Conditions
- USDA Accepted
- KB Version offers bright, LCD backlit display

FS Series Specifications

Model	FS-6KA	FS-15KA	FS-30KA	FS-6KB	FS-15KB	FS-30KB
Capacity (kg)	6kg	15kg	30kg	6kg	15kg	30kg
Resolution (g)	1g (0-3kg) 2g (3-6kg)	2g (0-6kg) 5g (6-15kg)	5g (0-15kg) 10g (15-30kg)	1g (0-3kg) 2g (3-6kg)	2g (0-6kg) 5g (6-15kg)	5g (0-15kg) 10g (15-30kg)
Capacity (lb)	15lb	30lb	70lb	15lb	30lb	70lb
Resolution (lb)	0.002 (0-6 lb) 0.005 (6-15 lb)	0.005 (0-15 lb) 0.01 (15-30 lb)	0.01 (0-30 lb) 0.02 (30-70 lb)	0.002 (0-6 lb) 0.005 (6-15 lb)	0.005 (0-15 lb) 0.01 (15-30 lb)	0.01 (0-30 lb) 0.02 (30-70 lb)
Capacity (oz)	240oz	480oz	1120oz	240oz	480oz	1120oz
Resolution (oz)	0.05 (0-120oz) 0.1 (120-240oz)	0.1 (0-240oz) 0.2 (240-480oz)	0.2 (0-480oz) 0.5 (480-1120oz)	0.05 (0-120oz) 0.1 (120-240oz)	0.1 (0-240oz) 0.2 (240-480oz)	0.2 (0-480oz) 0.5 (480-1120oz)
Display	LCD, Digital Section - 7 segment x 5 digits, 16mm height Analog sweep display section with 31 segments. "B" Versions have a backlit display.					
Sensitivity Drift	20ppm (5°C ~ 35°C / 41°F ~ 95°F)					
Operating Temp.	-10°C ~ 40°C / 14°F ~ 104°F					
Weight	Approximately 10 kg / 22 lb (Approximately 11.5 kg / 25 with shipping carton)					
Power	6 x UM2/C size batteries or AC Adapter					
Pan Size (mm)	310 x 310	310 x 310	310 x 310	310 x 310	310 x 310	310 x 310
(W)x(D) (Inch)	12.2 x 12.2	12.2 x 12.2	12.2 x 12.2	12.2 x 12.2	12.2 x 12.2	12.2 x 12.2
Dimensions (mm)	310 x 450 x 444	310 x 450 x 444	310 x 450 x 444	310 x 450 x 444	310 x 450 x 444	310 x 450 x 444
(W)x(D)x(H) (Inch)	12.2 x 17.7 x 17.5	12.2 x 17.7 x 17.5	12.2 x 17.7 x 17.5	12.2 x 17.7 x 17.5	12.2 x 17.7 x 17.5	12.2 x 17.7 x 17.5

Model	FS-30KLA	FS-60KLA	FS-150KLA	FS-30KLB	FS-60KLB	FS-150KLB
Capacity (kg)	31kg	60kg	150kg	31kg	60kg	150kg
Resolution (g)	5g (0-15kg) 10g (15-31kg)	10g (0-30kg) 20g (30-60kg)	20g (0-60kg) 50g (60-150kg)	5g (0-15kg) 10g (15-31kg)	10g (0-30kg) 20g (30-60kg)	20g (0-60kg) 50g (60-150kg)
Capacity (lb)	70 lb	150 lb	350 lb	70 lb	150 lb	350 lb
Resolution (lb)	0.01 (0-35 lb) 0.02 (35-70 lb)	0.02 (0-60 lb) 0.05 (60-150 lb)	0.05 (0-150 lb) 0.1 (150-350 lb)	0.01 (0-35 lb) 0.02 (35-70 lb)	0.02 (0-60 lb) 0.05 (60-150 lb)	0.05 (0-150 lb) 0.1 (150-350 lb)
Capacity (oz)	1120 oz	2400 oz	5600 oz	1120 oz	2400 oz	5600 oz
Resolution (oz)	0.2 (0-560) 0.5 (560-1120)	0.5 (0-1200) 1 (1200-2400)	1 (0-2400) 2 (2400-5600)	0.2 (0-560) 0.5 (560-1120)	0.5 (0-1200) 1 (1200-2400)	1 (0-2400) 2 (2400-5600)
Display	LCD, Digital Sections 7 segment x 5 digits 16mm height Analog sweep display section with 31 segments. "B" Versions have a backlit display.					
Sensitivity Drift	20ppm (5°C ~ 35°C / 41°F ~ 95°F)					
Operating Temp.	-10°C ~ 40°C / 14°F ~ 104°F					
Weight	13kg	19kg	19kg	13kg	19kg	19kg
Power	6 x 'C' size batteries or AC Adapter					
Pan Size (mm)	330 x 424	390 x 530	390 x 530	330 x 424	390 x 530	390 x 530
(W) x (D) (Inch)	13.0 x 16.7	15.4 x 20.9	15.4 x 20.9	13.0 x 16.7	15.4 x 20.9	15.4 x 20.9
Dimensions (mm)	330 x 818 x 828	390 x 929 x 835	390 x 929 x 835	330 x 818 x 828	390 x 929 x 835	390 x 929 x 835
(W)x(D)x(H) (Inch)	13.0 x 32.2 x 32.6	15.4 x 36.6 x 32.9	15.4 x 36.6 x 32.9	13.0 x 32.2 x 32.6	15.4 x 36.6 x 32.9	15.4 x 36.6 x 32.9

Specifications are subject to change for improvement without notice

Options

- FS- 01 Wall Mount Bracket
- FS- 03 RS-232C/Comparator
- TB:163 AC Adapter (120V) (Not Included w/Product)
- TB:164 AC Adapter (220V)
- TB:163W..... AC Adapter NEMA 4X Washdown

Accessories

- AD-1191 Compact Printer
- AD-8118A Journal Printer
- AD-8118B Universal Printer
- AD-8121A Multi-Function Printer

Note: To order USDA approved FS-KL models, add an "S" to the end of the model number, for example FS-60KLBS